



Why choose **evosure** divider board?



EXTRA STRONG: Manufactured from Evosure Original hardboard, Evosure Divider Board is durable and can be tempered to further enhance its inherent strength qualities, making it a highly useful packaging solution.



MOISTURE RESISTANT : Manufactured to possess impressive water resistant properties, Divider Boards are a highly versatile solution for the packaging industry.



GREEN: Evosure Divider Boards are formaldehyde free, carry an e-zero emission rating, and use natural binders. They are manufactured in an environmentally conscious manner in accordance with FSC™ regulations.



VERSATILE: Evosure Divider Boards are available in square edge (normal un-rounded) or 30 degree rounded corners to eliminate tearing the shrink wrap plastic.



EASY WIPE: Evosure Divider Boards are easy to clean. Simply use mild soapy water to remove dust and dirt from the surface.



ANTI-WARP: Being manufactured from Evosure Original, these Divider Boards are denser than other thin board substitutes on the market (MDF and HDF). This makes Evosure Divider Boards less prone to warping while still remaining lightweight.



LONGEVITY: The durable nature of Evosure hardboard ensures that our Divider Boards have an extended lifespan and can be reused up to 8 times.



BRANDED: Our Divider Boards can be branded with your company logo.

Physical properties of **evosure** divider board

PROPERTY	UNIT	SPECIFICATION
Nominal Thickness	mm	3.2
Thickness Tolerance	mm +/-	0.4
Mass	kg/m ² approx	3.2
Density	kg/m ³ min	960
Bending Strength (M.O.R) Modular of Rupture	MPa min	50
Internal Bond Strength	MPa min	1.0
Shear Resistance	MPa Av	40
Lateral Nail Holding Ability (Using a 3mm Diameter Pin)	N/mm Thick min	125
Water Absorption After 24 hrs. Immersion at 20°C	% max	24
Thickness Increase After 24hrs in Water at 20°C	% max	16
Thickness Increase from 33% to 90% RH at 20°C	% max	7
Unear Expansion/Contraction Range 33% to 90% RH at 20°C	%	0.25
Thermal Conductivity (k)	W/m ² C Av	0.14
Thermal Resistance (R)	m ² °C/W Av	0.025


SIZE SPECIFICATIONS: Cut to customers' specifications.



We offer a wide range of premium quality hardboard, softboard and door skin products.



evosure original

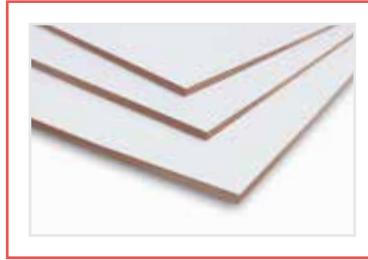

evosure fincote



evosure tempered



evosure cornice



evosure divider board



evosure pegboard



evosoft original



evosoft primecote



evosoft flexijoint

evodoor

We stock a range of pre-coated, sealed and primed door skins for interior use.

Proudly brought
to you by Evowood:



The mark of
responsible forestry
FSC® C108473

